


PROHDMISPSW2

2 Way Bi-Directional HDMI Switch

PROception

This device can either switch two HDMI devices to one HDMI display or alternatively switch one HDMI device to two HDMI displays.

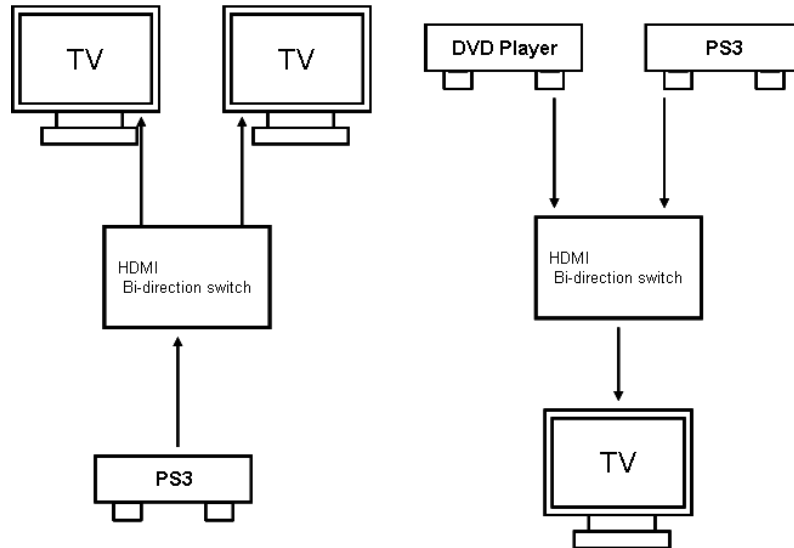

Features:

- No power required.
- Maximum HDMI throughput current 15mA.
- Full compliance with the HDMI specification V1.0, V1.1, V1.2, V1.3, V1.4.
- Button selection control.
- With active LED display port indicator.
- 3 HDMI A/V connectors.
- LED active port display.
- Easy install & operation.
- Supports HDMI resolutions up to 4k 3840*2160 30Hz.
- Support MAX cable length: 5m.
- Plug & play.
- Dimensions: 42x50x25 mm (W, H, D).
- Weight: 35g.
- Housing: plastic.